


SPECIFICATIONS


Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

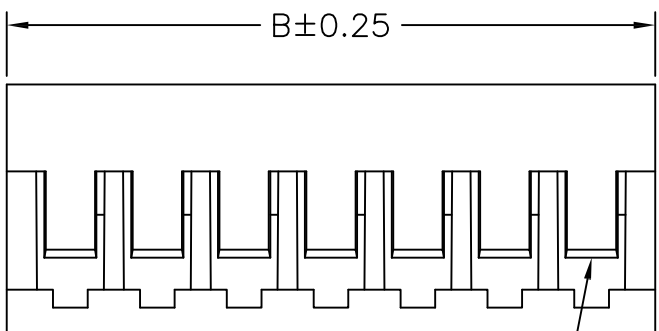


Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
02P	1.50	3.70
03P	3.00	5.20
04P	4.50	6.70
05P	6.00	8.20
06P	7.50	9.70
07P	9.00	11.20
08P	10.50	12.70
09P	12.00	14.20
10P	13.50	15.70
11P	15.00	17.20
12P	16.50	18.70
13P	18.00	20.20
14P	19.50	21.70
15P	21.00	23.20

Circuit 1



P.C.B. LAYOUT



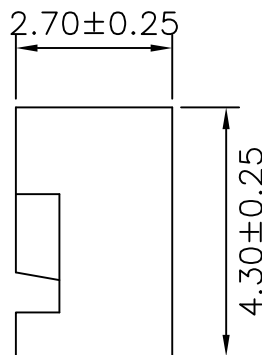


B1501H00-NPX-HF-XX

① ② ③④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank : Natural type
- ⑤ HF : Halogen Free
- ⑥ NK : No Mark
Blank : Mark

				GENERAL TOLERANCE	UNIT: mm	DATE	TITLE:			东莞市宏欣蓝电子有限公司		
				.X±0.30	X°±1°	DRAWN: 张自豪	Pitch1.50mm Housing 180度					
				.XX±0.20	.X°±	CHECKED:	PROJECT	PART NO.	B1501H00-NPX-XX-XX			
				.XXX±0.10	.XX°±	APPROVED:	VER.	SCALE:	N/A	DRAWING NO.	B1501H00	
LTR	NAME	DATE	VERISION RECORD				A0	SHEET:	1/1			
1	2	3	4	5	6	7	8	9				

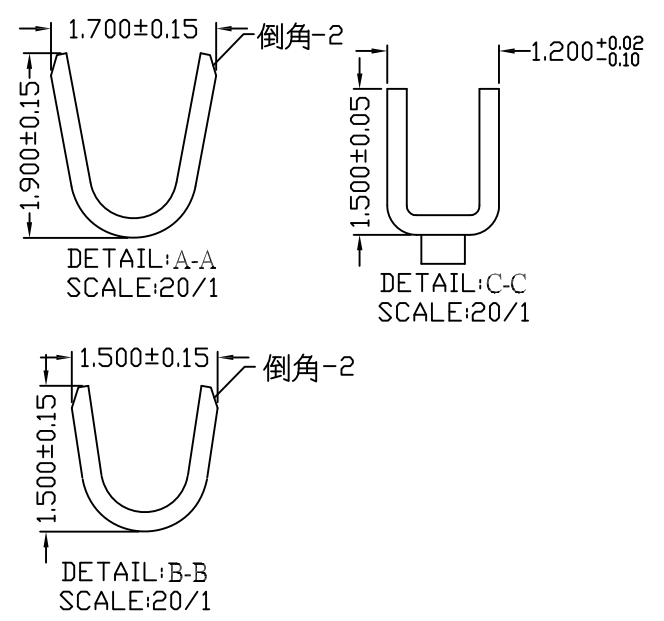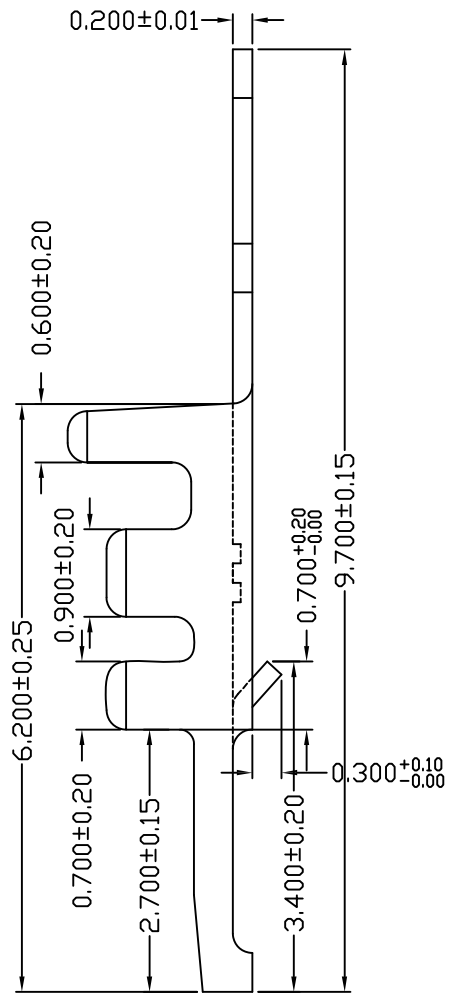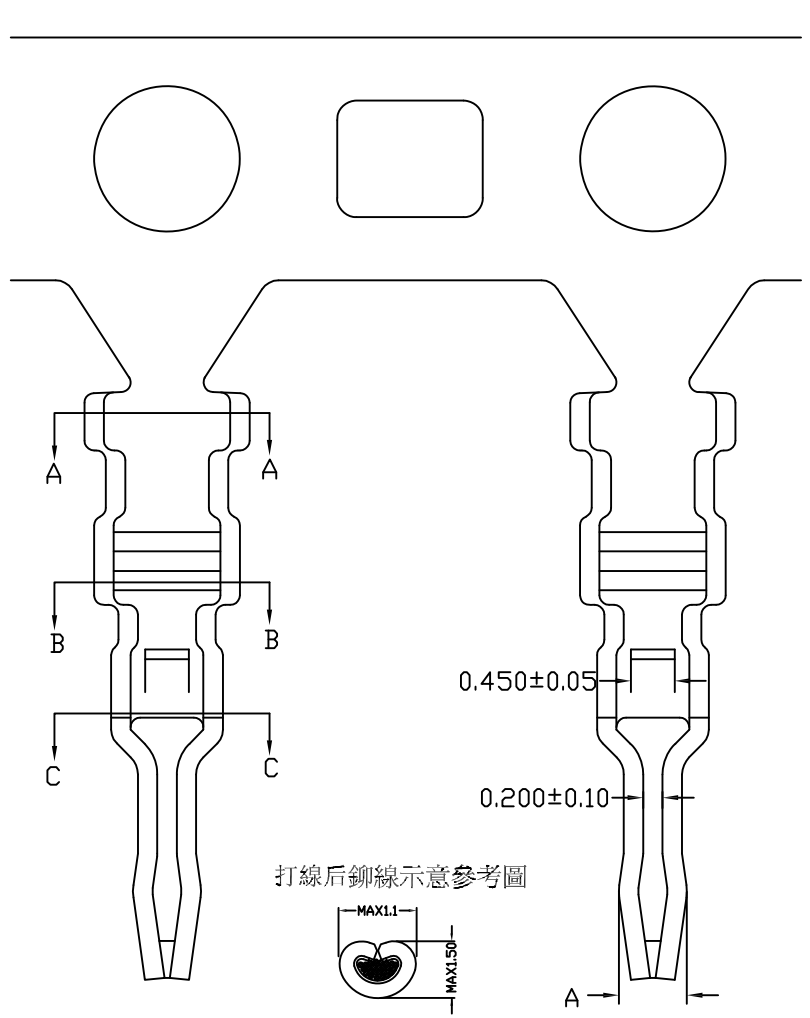

B1501T0B-XX-XX

- NK: No Mark
- Finish
- 2--Tin-plated(先鍍后沖)
- 2E--Tin-plated(先沖后鍍)
- Brass
- 外觀形态: 180° Terminal

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
B1501T0B-XX-XX	AWG#28-#30	1.00mm(max)	Brass	Tin-plated	10,000pcs

LTR	NAME	DATE	VERSION RECORD	GENERAL TOLERANCE		UNIT: mm		DATE			TITLE:				
				.X ± 0.30	X° ± 1°	DRAWN:	张自豪	2013.04.05	VER.	SCALE:	N/A	Pitch 1.50mm Terminal 180度			
				.XX ± 0.25	.X° ±	CHECKED:									
				.XXX ± 0.10	.XX° ±	APPROVED:									

东莞市宏欣蓝电子有限公司

PROJECT	PART NO.	B1501T0B-XX-XX
DRAWING NO.	B1501T0B	