


Specifications :


- Voltage rating: 150V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤50mΩ
- After environmental testing: ≤60mΩ

Material:

Insulator: LCP UL 94V-0
 Contact: Phosphor Bronze
 Solder Nail: Phosphor Bronze
 Plating: Tin plated over Nickel
 Mates With 3001 Series Single Row Wafer

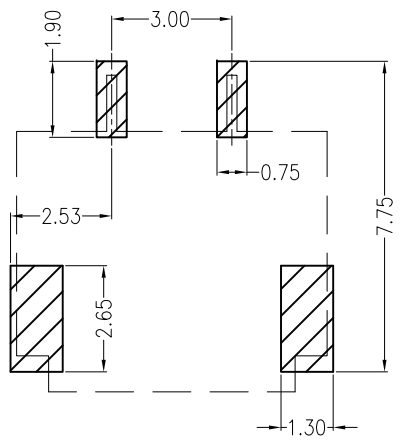

Board Layout
 General Tolerance: ±0.05



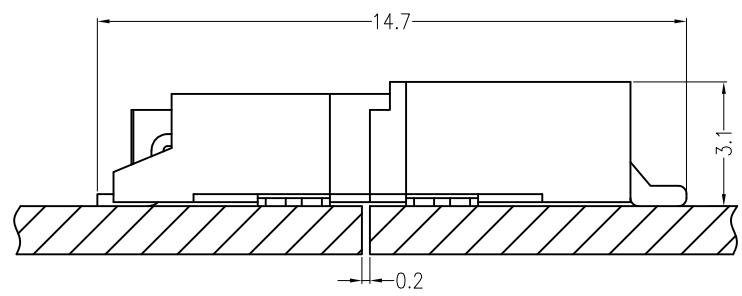


Assembly Layout


3001LW90-02P-S X X X XX
 ⑪ ⑫ ⑬ ⑭

- ⑪ N=Halogen Free R=Rohs
- ⑫ Material: 9=Nylon 9T L=LCP
- ⑬ Color: B=Black E=Beige
- ⑭ Plating Code: T1=Tin Plated
G1=Gold-Flash

				GENERAL TOLERANCE		UNIT: mm		DATE		TITLE:			东莞市宏欣蓝电子有限公司			
				.X ± 0.30		X° ± 1°		DRAWN: 张自豪 2014.08.26		Pitch 3.0mm SMT Wafer 2P						
				.XX ± 0.20		.X° ±		CHECKED:		VER. SCALE: N/A			PROJECT	PART NO.	3001LW90-02P-SRLET1	
LTR NAME DATE VERISION RECORD				.XXX ± 0.10		.XX° ±		APPROVED:		A0	SHEET: 1/1	DRAWING NO.	3001LW90-02P-SRLET1			
1	2	3	4	5	6	7	8	9								

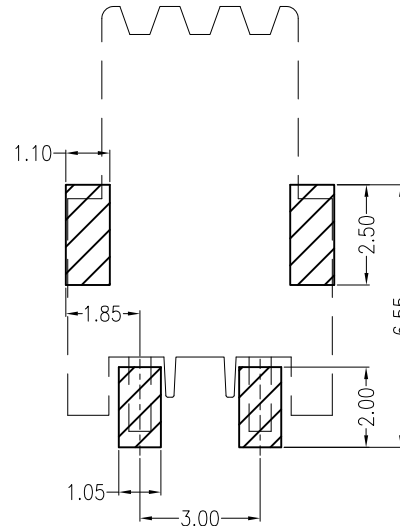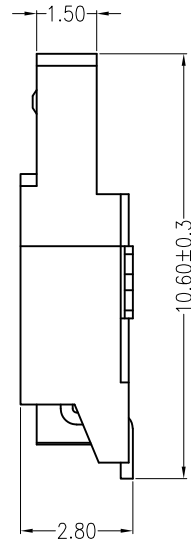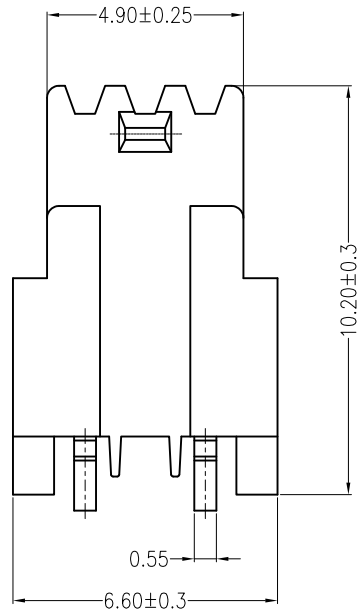

Board Layout
General Tolerance: ±0.05


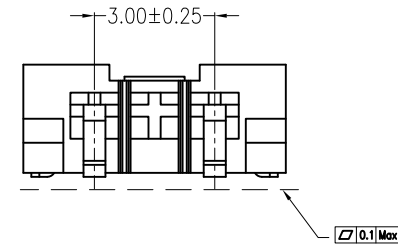


■ Specifications :

- Voltage rating: 150V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤50mΩ
- After environmental testing: ≤60mΩ

Material:

Insulator: LCP UL 94V-0
 Contact: Phosphor Bronze
 Solder Nail: Phosphor Bronze
 Plating: Tin plated over Nickel
 Mates With 3001 Series Single Row Wafer

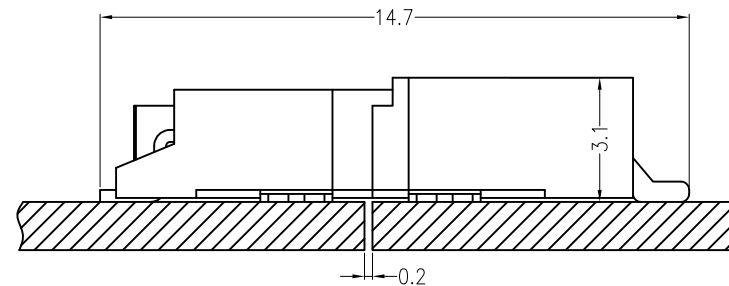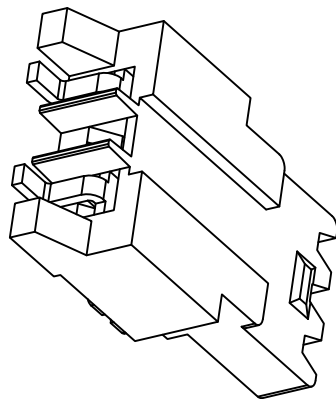

Assembly Layout

3001W90-02P-S X X X XX
 ①②③ ④





- ① N=Halogen Free R=Rohs
- ② Material: 9=Nylon 9T L=LCP
- ③ Color: B=Black E=Beige
- ④ Plating Code: T1=Tin Plated
G1=Gold-Flash

				GENERAL TOLERANCE		UNIT: mm		DATE		TITLE:		
				.X ± 0.30		X° ± 1°		DRAWN: 张自豪 2014.08.26		Pitch 3.0mm SMT Wafer 2P		
				.XX ± 0.20		.X° ±		CHECKED:		PROJECT		
				.XXX ± 0.10		.XX° ±		APPROVED:		PART NO. 3001W90-02P-SRLET1		
LTR	NAME	DATE	VERSION RECORD							VER.	SCALE:	N/A
1	2	3	4							A0	SHEET:	1/1
										DRAWING NO. 3001W90-02P-SRLET1		

东莞市宏欣蓝电子有限公司

PROJECT PART NO. 3001W90-02P-SRLET1

DRAWING NO. 3001W90-02P-SRLET1

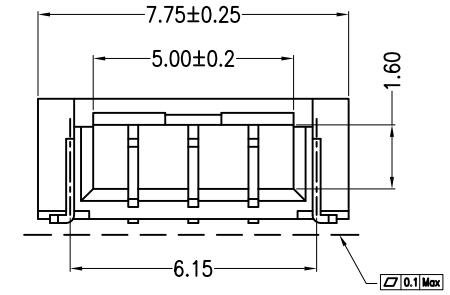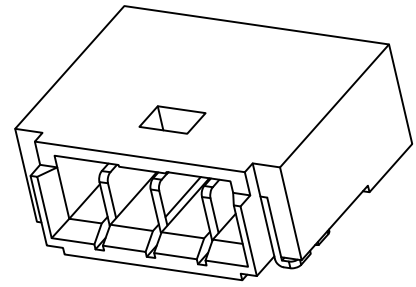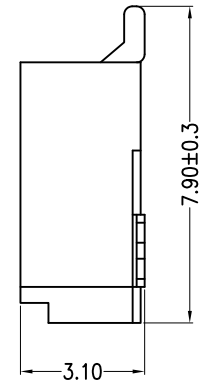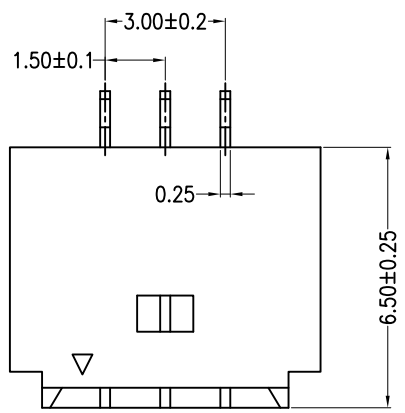


Specifications :


- Voltage rating: 150V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤50mΩ
- After environmental testing: ≤60mΩ

Material:

Insulator: LCP UL 94V-0
 Contact: Phosphor Bronze
 Solder Nail: Phosphor Bronze
 Plating: Tin plated over Nickel
 Circuits: 03
 Mates With 3001 Series Single Row Wafer

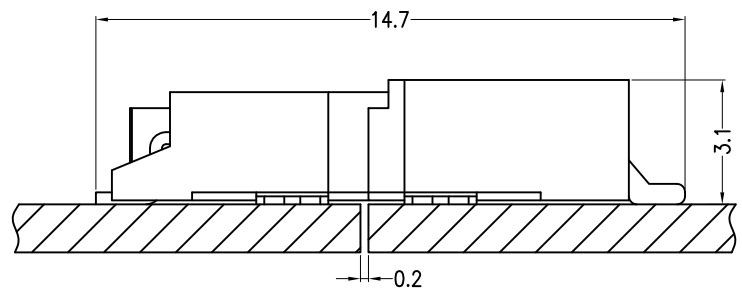

Assembly Layout

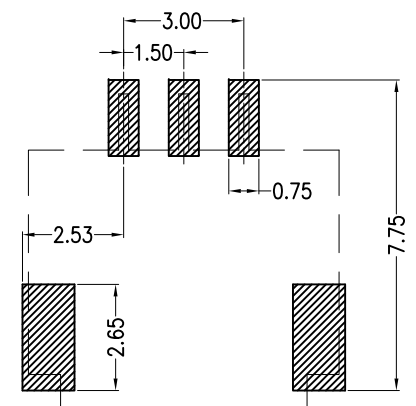





Board Layout
 General Tolerance: ±0.05

3001LW90-03P-S X X X XX
 ①②③ ④

- ① N=Halogen Free R=RoHS
- ② Material: 9=Nylon 9T L=LCP
- ③ Color: B=Black E=Beige
- ④ Plating Code: T1=Tin Plated
G1=Gold-Flash

				GENERAL TOLERANCE		UNIT: mm		DATE		TITLE:		
				.X ± 0.30		X° ± 1°		DRAWN: 张自豪 2014.08.26		Pitch 3.0mm SMT Wafer 3P		
				.XX ± 0.20		.X° ±		CHECKED:		PROJECT		
				.XXX ± 0.10		.XX° ±		APPROVED:		PART NO. 3001LW90-03P-SRLET1		
LTR	NAME	DATE	VERSION RECORD							VER.	SCALE:	N/A
1	2	3	4							A1	SHEET:	1/1
										DRAWING NO. 3001LW90-03P-SRLET1		

东莞市宏欣蓝电子有限公司

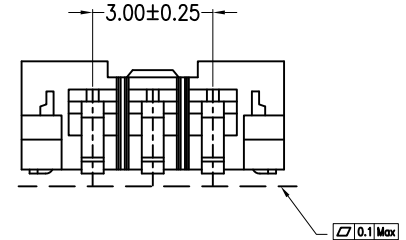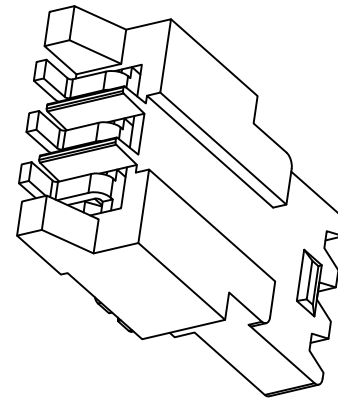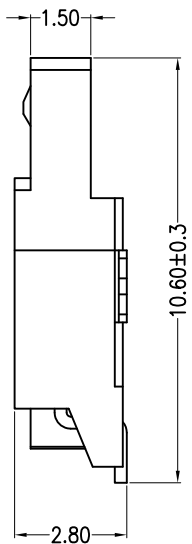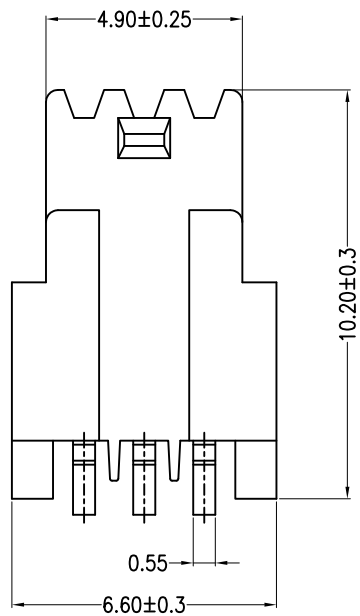


■ Specifications :


- Voltage rating: 150V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤50mΩ
- After environmental testing: ≤60mΩ

Material:

Insulator:LCP UL 94V-0
 Contact:Phosphor Bronze
 Solder Nail:Phosphor Bronze
 Plating:Tin plated over Nicke
 Circuits:03
 Mates With 3001 Series Single Row Wafer

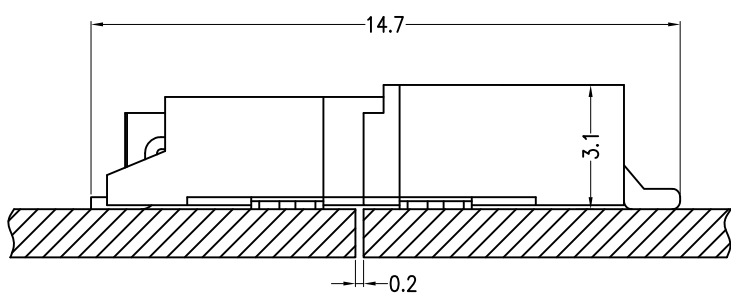

Assembly Layout

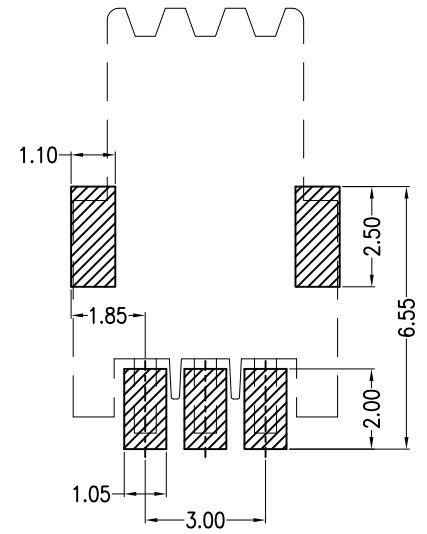


Board Layout
 General Tolerance: ±0.05

3001W90-03P-S X X X XX
 ①②③ ④
 ① N=Halogen Free R=Rohs
 ② Material:9=Nylon 9T L=LCP
 ③ Color:B=Black E=Beige
 ④ Plating Code:T1=Tin Plated
 G1=Gold-Flash

				GENERAL TOLERANCE		UNIT: mm		DATE		TITLE:		
				.X ± 0.30		X° ± 1°		DRAWN: 张自豪 2014.08.26		Pitch 3.0mm SMT Wafer 3P		
				.XX ± 0.20		.X° ±		CHECKED:		PROJECT		
				.XXX ± 0.10		.XX° ±		APPROVED:		PART NO. 3001W90-03P-SRLET1		
LTR	NAME	DATE	VERSION RECORD							VER.	SCALE:	N/A
1	2	3	4							A1	SHEET:	1/1
										DRAWING NO. 3001W90-03P-SRLET1		

东莞市宏欣蓝电子有限公司



由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作